



CCU-SK1000/CA-SK300/TL-SK68/SK-600
Sony/Panasonic/Canon/Jvc




FLOATING
POINT



Handy Camera Control System

SKH Camera Optical Fibre Adaptor

CA-SK300

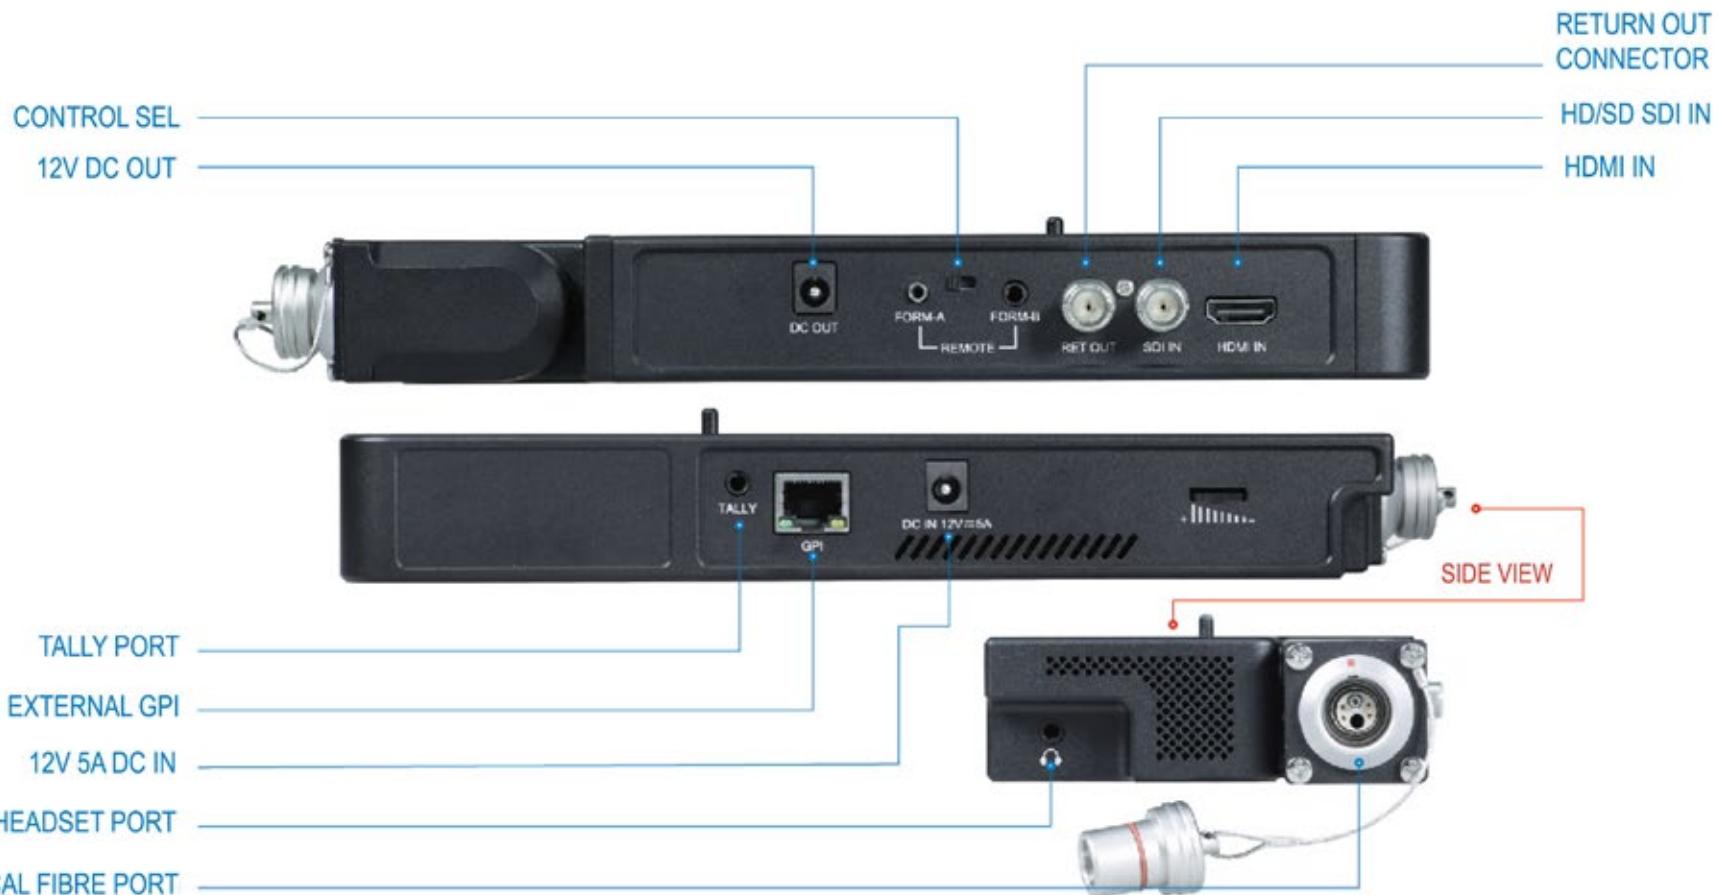

Power Rating	Power Input	Operation Temp	Storage Temperature	External Dimension	Net Weight
12W	DC12V	-10° ~ +50°	-20° ~ +60°	108mm x 259mm x 37mm	0.7kg
Optical Fibre	Video Connectors			Control	Other Connectors
2K93B	SDI in / HDMI in / Return out			Remote	DC in / DC out / GPI / Tally / Intercom



Power Rating	Power Input	Operation Temp	Storage Temperature	External Dimension	Net Weight
18W	AC100V-240V	-10° ~ +50°	-20° ~ +60°	100mm x 370mm x 124mm	2.1kg
Optical Fibre	Video Connectors		Control	Other Connectors	
2K.93B	SDI out(x2) / Return in / Return out		GPI	Intercom-Tally	

Note: The controllable parameters may be in difference among different camcorder models and firmware versions.



University 4-Channels Studio

System integration with Sony PXW-FS7 camcorder with SKH SK-1000 camera control system.

The camcorders are value added. They can be used as system cameras in both studio production and various shooting events in activities of the campus.



TV Station 4-Channels OB Van

A mix system consists of shoulder camcorders and handy camcorder. SKH makes the devices go live!

Three channels SKH SK3100 camcorder expansion system for Panasonic AJ-PX800MC plus one channel of SKH SK1000 handy camera control expansion for AJ-PX298MC.





Media Center 4-channels OB Van

Making use with SKH camera expansion system.

Four sets of Sony PXW-Z280 camcorders can be operate with CCU-RCP convenience.

A compact and simple system is implemented inside OB Van that make perfect live streaming in 5G transmission era.



Training Center 4-CH Studio

An intelligent remote control system is set inside training institute.

The system consists of 4 sets of Sony handy cameras, SKH camera control system expansion units and PTZ control with SK600 remote pan-tilt platforms.

Accessories



Camera TALLY Light TL-SK68

Customized product for handy system cameras.
Flexible installation, firmly mount and easy to use.
Clear Tally signaling visible from long-distance

Pan-Tilt Platform PT-SK600

Power by camera adaptor CA-SK300
Connect with standard network cable
Unattended PTZ camera remote control from CCU-SK1000

